

Avantgarde

Superior class mailboxes



The basic model





Freestanding letter boxes

Recommended installation height is 1600 mm from floor level (FFL).

Letter box systems with base plates



III. 3/1

Fastening with base plates

For optimal mounting we recommend the use of M12 bolts. The ground has to be firm and clean.

Letter box systems for concreting



Concreting in

The mailbox comes with a total height of 2000 mm, allowing 400 mm for concreting. As a foundation we recommend a con-crete cube of about 400 x 400 mm in volume.

Letter box systems for flush-mounted mounting

For flush-mounting letter box systems there are two different frame systems. In addition to the standard angular frame, we also offer a special shadow gap frame with a small visible surface as shown in the illustration below. This shadow gap ensures that the appearance of the letterbox system is emphasized against the background whilst sitting flush with the wall. The modern and timeless design results in a harmonious overall image, and integrates the mail box system perfectly into the wall.



Letter box system for wall mounting



Double letter box system with intercom box. Bell pushes with LED lighting. Letter box with second name plate and tag "NO JUNK MAIL".





Freestanding letter box system with camera and lighting button.



Free standing letter box system.

Colours

Every letter box system is available in the following version:





- JU Standard colour (RAL9016, RAL9007)
- RAL and DB colours of choice, or powder provided by customer
- Stainless steel
- Anodized aluminium

III. 5/3

III. 6/1

Double letter box for wall mounting with intercom box on top and black house number engraving.



Wall mounted letter box systems may be ordered with a fastening rail. The fastening rail allows for balancing out an uneven walls.





III. 6/4 Letter box system for wall mounting.







Letter box system with surround frame for flush-mounted wall mounting. With intercom box and newspaper box.



Letter box with intercom box, bell push and light switch.



Avantgarde, house number engraving and camera.



and camera.




Intercom box in segmented array, may also available as a one piece intercom door.

Freestanding letter box system with backlit engraving. For bolting onto ground or for setting into concrete.



| Description | | Dimensio W • | ons (mm) H · D | Item Nr |
|---------------------------|-----|-----------------|-------------------|---------|
| Letter box | DIN | 300 42 | 20 150 | 05-100 |
| Letter box | DIN | 400 42 | 20 150 | 05-300 |
| Intercom box | | 200 42 | 20 150 | 05-107 |
| Intercom or engraving box | | 300 20 | 00 150 | 05-108 |
| Intercom or engraving box | | 400 20 | 00 150 | 05-308 |
| Newspaper box | | 300 20 | 00 150 | 05-120 |
| Newspaper box | | 400 20 | 00 150 | 05-320 |

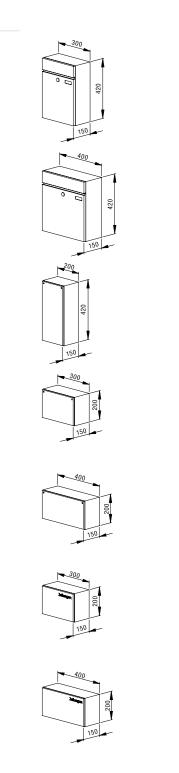



| | | | | Dimensions (mm) W · H · D | Item Nr. |
|-----|-------------|---|--|---|--|
| DIN | 300 220 380 | 05-500 | Engraving box | 300 200 380 | 05-508 |
| DIN | 300 330 380 | 05-520 | Intercom box | 300 220 380 | 05-509 |
| DIN | 400 220 280 | 05-700 | Intercom or engraving box | 300 330 380 | 05-510 |
| DIN | 400 330 280 | 05-720 | Engraving box | 400 200 280 | 05-708 |
| | 200 220 380 | 05-507 | Intercom box | 400 220 280 | 05-709 |
| | 200 220 280 | 05-707 | Intercom or engraving box | 400 330 280 | 05-710 |
| | 200 330 380 | 05-527 | | | |
| | 200 330 280 | 05-727 | | | |
| | DIN | DIN 300 330 380 DIN 400 220 280 DIN 200 220 380 200 220 280 200 330 380 | DIN 300 330 380 05-520 DIN 400 220 280 05-700 200 220 380 05-707 200 220 280 05-707 | DIN 300 330 380 05-520 Intercom box | DIN 300 330 380 05-520 Intercom or engraving box 300 200 330 |

| Description | Item Nr. | Description | Item Nr. |
|---|------------------------|---|----------|
| Flat Surround 2 mm sheet coating | | Speech Grille laser cut | 21-174 |
| Aluminium Stainless | 20-242A 20-242EA | | |
| Rear plate for freestanding letter box systems | | | |
| Aluminium Stainless | 20-242R 20-242RE | | |
| | | Bell push flush-mounted | 21-216FE |
| | | Bell push flush-mounted, LED ring lighting white | 21-216FW |
| NOVA Surround Standard type | | Bell push flush-mounted, LED ring lighting blue | 21-216FB |
| Aluminium | 20-999A | Bell push flush-mounted, LED ring lighting red | 21-216FR |
| Stainless | 20-999EA | Name plate | 21-134 |
| Rear plate for freestanding letter box systems | | theft protected flush-mounted, plexiglass | 2 |
| Aluminium Stainless | 20-242R 20-242RE | Name plate theft protected flush-mounted, plexiglass with inox name tag | 21-134E |
| | | Name plate | 21-134EV |
| NOVA Surround | | theft protected flush-mounted, plexiglass with anodized name tag | |
| Continuing as stand | | Name plate theft protected | 21-134RP |
| Aluminium Stainless | 20-999AFL 20-999EFL | flush-mounted, plexiglass with Resopal name tag | |
| Rear plate for freestanding letter box systems | | | |
| Aluminium Stainless | 20-242R 20-242RE | Tag engraved (text to be defined by customer) resopal, matches name plate 21-134 | 21-146RP |
| | | Tag engraved (text to be defined by customer) inox, matches name plate 21-134 | 21-146E |
| Base plates for bolting onto ground. Size of base plate depends on the letter box depth selected. Freestanding letter box systems only. | | Tag engraved (text to be defined by customer) anodized, matches name plate 21-134 | 21-146EV |
| Aluminium Stainless | 20-999BP 20-999EBP | Tag engraved with lighting symbol resopal, matches name plate 21-134 | 21-147RP |
| | 20 000201 | Tag engraved with lighting symbol inox, matches name plate 21-134 | 21-147E |
| | | Tag engraved with lighting symbol | 21-147EV |



★ JU-Metallwarenfabrik GmbH

Landauerstraße 14, 21-23 74582 Gerabronn

+49 (0) 7952 603 - 0

+49 (0) 7952 603 - 102

info@ju.eu

info@ju.eu

www.ju.eu

★ JU-Metalltechnik GmbH

Hoymer Str. 10 06469 Seeland

+49 (0) 34741 933 - 0

+49 (0) 34741 933 - 10

≥ info@ju.eu

www.ju.eu