


Mailbox systems, display cases, steles, signages, parcel locker systems, special equipment

# **PLANNING DOCUMENTS**



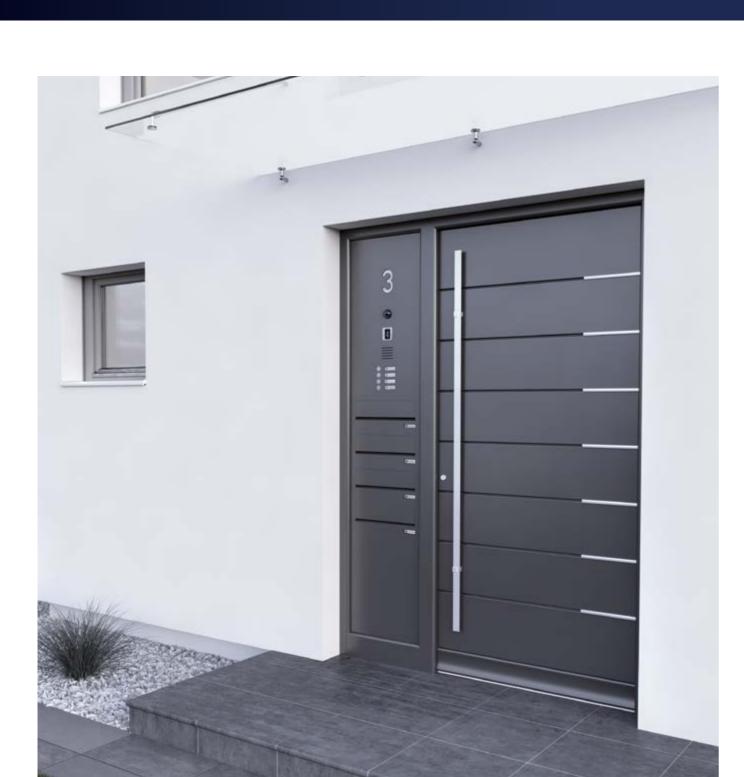

First Class fully insulated door side system model 02-941 ISO aluminium front plate and mail slot flap I/D compartment with intercom grid 21-174 doorbell button 21-216FW module preparation for modules to be supplied by the customer (fingerprint, camera) house number engraving with white acrylic glass LED backlit





### **Economy Class**

heat-insulated

(simple and functional design)

- conventionally proven mail slot flaps
- front plate 24 44 mm, completely
- LM intercom grid, plastic doorbell/ light sensor
- standard colours: EV1 at LM front, RAL 7016, RAL 8022, RAL 9007, RAL 9016 and DB 703, all other colours with a colour surcharge
- standard lock 21-109

# **Business Class**

(model for sophisticated demands)

- SCS version (dampened mail slot flaps) at no surcharge
- front plate 24 44 mm, completely thermally separated
- punched intercom grid, stainless steel doorbell/light sensor
- LED backlit flush-mounted
- name plate
- reinforced pin cylinder with master key function 21-120

### First Class

(fully-insulated model)

- flush-mounted, cushioned and insulated Avantgarde mail slot flaps
- front plate 30 44 mm, thermally separated
- laser cut intercom grid
- flush-mounted stainless steel doorbell button with ring lighting
- LED backlit flush-mounted
- name plates
- housings and removal doors insulated, incl. surrounding seal
- reinforced pin cylinder with master key function 21-120



Model 02-800 ISO

### Flush-mounted insulated mail slot flaps

The fully-insulated mailbox system for installation in the door side has flush-mounted, recessed Avantgarde mail slot flaps with finger recess for easy opening. The mail slot flaps are fitted with a return brake and interlock in order to prevent rattling noises and wind effects. As is the case with all door side system, mail is thrown in from the front and removed from the rear or the interior compartment.

- with flush-mounted, illuminated house number made of plexiglas
- prepared for on-site installation components (camera, fingerprint, etc.)
- intercom/doorbell system
- flush-mounted, illuminated doorbell buttons
- all lighting elements are designed in long-life and energy-saving LED technology.

The front plate can be thermally insulated in various insulation thicknesses for door side systems.



First Class fully insulated door side panels Model 02-841 ISO aluminium front plate and mail slot flap I/D compartment with intercom grid 21-174 doorbell button 21-216FW name plate 21-134 LED strip light street/house number engraving

# Standard model:

- fully-insulated inner box with 10 mm insulation all around
- door 10 mm insulated with additional rubber seal
- mail slot flap insulated with a soft-close system
- front plate from 30 mm installation thickness



fully-insulated mailbox design

Box width: 300 mm Mail slot: 250 mm (DIN C4)

Item		Unit	Dimen W	sions i		Order number	
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	165	390	02-841 ISO	300 390
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	220	390	02-842 ISO	300 390
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	330	390	02-843 ISO	300
Fully-insulated installation box, unfitted box can also be used as an info or dummy box		pc.	300	220	160	02-852 ISO	300 160
Fully-insulated installation box, unfitted box can also be used as an info or dummy box		pc.	300	330	160	02-853 ISO	0000

Box width:	375 mm	Model 02-900 ISO
Mail slot:	325 mm (DIN C4 landscape)	Middel 02-900 150

Item		Unit		isions i	n mm D	Order number	
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375	165	290	02-941 ISO	591
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375	220	290	02-942 ISO	375 290

# Fully-insulated door side systems - 02 JU

Model 02-900 ISO	Box width: 375 mm Mail slot: 325 mm (DIN C4 landscape)				Box width: 300 mm Mail slot: 250 mm (DINC4)				Model 02-400 ISO
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
330	Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 330 290	02-943 ISO	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	300 440 160	02-401 ISO	440
375 290					Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 160	02-405 ISO	300 160
220	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 220 160	02-952 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	300 200 160	02-406 ISO	200
375 160									300 160
37/5 (60	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 330 160	02-953 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 160	02-407 ISO	200 (60)
Model 02-360 ISO	Box width: 375 mm Mail slot: 325 mm (DIN C4 landscape)				Box width: 375 mm Mail slot: 325 mm (DINC4 landscape)				Model 02-430 ISO
_	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	_
350	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 160	02-361 ISO	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 440 160	02-431 ISO	440
	Fully-insulated installation box, unfitted	pc.	375 320 160	02-365 ISO	Fully-insulated installation box, unfitted	pc.	375 440 160	02-435 ISO	

320	removal door with cylinder lock, 2 keys and name plate, door hinged on the right				removal door with cylinder lock,  2 keys and name plate, door hinged on the right				
375 160	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 160	02-365 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 4	40 160	02-435 ISO
00Z	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 160	02-366 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 2	00 160	02-436 ISO
200 160	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 160	02-367 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 4	40 160	02-437 ISO

# 02 - Through-wall mailbox for the door side

Model 02-100

Box width: Mail slot:

250 mm 230 mm (DIN C4) Box width:

270 mm Mail slot: 250 mm (DIN C4)

Item	Unit	Dimensions in mm W · H · D	Order number	Item		Unit	Dimensions in mm W · H · D	Order number
Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	250 100 380	02-112	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	270 110 380	02-741
Through-wall mailbox, diagonal	pc.	250 100/310 320	02-113	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate,	DIN	pc.	270 165 380	02-744
straight upper removal side 310 mm portrait, box can also be used as an installation box, door hinged on the right	NIN.			door hinged on the right  Through-wall mailbox, horizontal box can also be used as an installation or dummy box,	DIN	pc.	270 220 380	02-742
Through-wall mailbox, diagonal door hinged on the right	DIN pc.	250 100 320	02-115	removal door with cylinder lock, 2 keys and name plate, door hinged on the right			070 000 000	00.740
Through-wall mailbox, diagonal	DIN pc.	250 200 320	02-128	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	270 330 380	02-743
box can also be used as an installation box, door hinged on the right	51N			Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN	pc.	270 110/320 320	02-746
Installation box box can also be used as an info or dummy box, door hinged on the right	pc.	250 100 80	02-125		DIN	pc.	270 110 320	02-747
Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right	рс.	250 200 80	02-129	Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN	pc.	270 220 320	02-748
Assembly surcharge depending on the box	pc.		20-100	Installation box, unfitted box can also be used as an info or dummy box,		pc.	270 110 80	02-751
				door hinged on the right  Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	270 165 80	02-754
				Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	270 220 80	02-752
				Installation box, unfitted box can also be used as an info or dummy box,		pc.	270 330 80	02-753



Model 02-700

Model 02-800

Box width: Mail slot:

300 mm 280 mm (C4) Box width:

375 mm 355 mm (DIN C4 landscape) Mail slot:

	Item	Un	t Dimensions in n W · H · D		Item		Unit	Dimensions in mm W · H · D	Order number	
300	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 110 38	30 02-841	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375 110 280	02-941	375
300 360	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 165 38	30 02-844	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right		pc.	375 165 280	02-944	375 280
300	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 220 38	30 02-842	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375 220 280	02-942	375 280
300 380	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 330 38	30 02-843	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right		pc.	375 330 280	02-943	375 780
300 30	Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN pc.	300 110/320 32	20 02-846	Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN	pc.	375 110/320 320	02-946	375 10 350
308 70	Through-wall mailbox, diagonal door hinged on the right	DIN pc.	300 110 32	20 02-847	Through-wall mailbox, diagonal door hinged on the right	DIN	pc.	375 110 320	02-947	378 70
300 10 022	Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN pc.	300 220 32	20 02-848	Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN	pc.	375 220 320	02-948	375 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
300 90	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right	pc.	300 110 80	02-851	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 110 80	02-951	375 90
991	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right	рс.	300 165 80	02-854	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 165 80	02-954	165
250	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right	pc.	300 220 80	02-852	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 220 80	02-952	250
300 50	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right	рс.	300 330 80	02-853	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 330 80	02-953	375



Model 02-900

Model 02-250	Box width: 260 mm Mail slot: 240 mm (DIN C4)				Box width: 375 mm Mail slot: 355 mm (DINC4 landscape)				Model 02-350
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W H D	Order number	
088	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	260 330 110	02-251	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 110	02-351	320
260	Installation box, unfitted box can also be used as an info or dummy box	pc.	260 330 110	02-255	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 110	02-355	375
260 110	Installation box, unfitted box can also be used as an info or dummy box	pc.	260 200 110	02-256	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 110	02-356	375 110
330	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 330 110	02-257	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 110	02-357	350
200 - 10	Assembly surcharge depending on the box	pc.		20-100	Assembly surcharge depending on the box	pc.		20-100	200
Model 02-330	Box width: 270 mm Mail slot: 250 mm (DIN C4)				Box width: 375 mm Mail slot: 355 mm (DIN C4 landscape)				Model 02-360
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
370	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	рс.	270 370 110	02-331	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 150	02-361	320
270	Installation box, unfitted box can also be used as an info or dummy box	pc.	270 370 110	02-335	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 150	02-365	375
270 1/0	Installation box, unfitted box can also be used as an info or dummy box	pc.	270 200 110	02-336	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 150	02-366	37.5 150
200 000	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 370 110	02-337	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 150	02-367	320

# 02 - Through-wall mailbox for the door side

box can also be used as an info or dummy box

box can also be used as an info or dummy box

Installation box, unfitted

# Through-wall mailbox for the door side - 02 JU

Model 02-390	Box width: 300 mm Mail slot: 280 mm (DINC4)				Box width: 375 mm Mail slot: 355 mm (DIN C4 landscape)				Model 02-430
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
440	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 440 110	02-391	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 440 150	02-431	440
300	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 110	02-395	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 440 150	02-435	375 750
000 NO	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 200 110	02-396	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 150	02-436	375 150
440	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 110	02-397	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 150	02-437	440
200	Assembly surcharge depending on the box	pc.		20-100	Assembly surcharge depending on the box	pc.		20-100	200 160
Model 02-400	Box width: 300 mm Mail slot: 280 mm (DIN C4)								
	Item	Unit	Dimensions in mm W · H · D	Order number					
440	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 440 150	02-401					
300	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 150	02-405					
	Installation box, unfitted	pc.	300 200 150	02-406	_				

# Front plates for door side systems with different insulation

In the case of door side systems, the insulation thickness of the corresponding front panel can be selected in accordance with the structural requirements.


# The different front plate types

There are two different versions, which are available in stainless steel or aluminum:

Simple front plate without thermal insulation 02-557

Thermally separated front plate 02-559

The box is located on a separate rear plate which is thermally separated on the insulation layer. This solution represents the best possible thermal insulation that can be achieved.

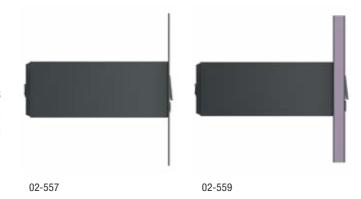

If desired, the front plate thickness can also be matched to the existing fender profile within certain limits. The standard thickness is 24 mm, alternatively also 28/32/36/40/44 mm.







Business class door side system model 02-841 stainless steel front plate mail slot flap with Soft-Close-System insulated mail slot flap

odel (
od

Item	Unit	Dimensions in mm W · H · D	Order number
Aluminium front plate 2.5 mm thick, without mail slot flap and accessories	m²	2,5	02-557
Stainless steel front plate 2 mm thick, without mail slot flap and accessories	m²	2	02-557E
Glass strip with thermal separation, to be used for model 02-100	cm	48 28,5	22-241
Aluminium front plate 24 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	24	02-559/24
Aluminium front plate 28 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	28	02-559/28
Aluminium front plate 32 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	32	02-559/32
Aluminium front plate 36 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	36	02-559/36
Aluminium front plate 40 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	40	02-559/40
Aluminium front plate 44 mm thick, with thermal separation, without mail slot	m² flap and accessories	44	02-559/44
Stainless steel front plate 24 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	24	02-559E/2
Stainless steel front plate 28 mm thick, with thermal separation, without mail slot	m² flap and accessories	28	02-559E/2
Stainless steel front plate 32 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	32	02-559E/3
Stainless steel front plate 36 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	36	02-559E/3
Stainless steel front plate 40 mm thick, with thermal separation, without mail slot	m <sup>2</sup> flap and accessories	40	02-559E/4
Stainless steel front plate 44 mm thick, with thermal separation, without mail slot	m <sup>2</sup>	44	02-559E/4





# 02 - Through-wall mailbox for the door side

Model 02

Mail slot flaps

Flush-mounted mail slot flaps for a minimum compartment height of 165 mm Starting from 30 mm front thickness in according to DIN EN 13724


Mail slot flaps Mail slot:

t: 35 mm (according to DIN EN 13724)

Item	Unit	Dimensions in mm W · H	Order number
Aluminium mail slot flap cushioned and insulated, name plate and anti-pilfer baffle, compatible with model 02-800 and 02-401	pc.	250 35	02-850
Stainless steel mail slot flap cushioned and insulated, name plate and anti-pilfer baffle, compatible with model 02-800 and 02-401	pc.	250 35	02-850E
Aluminium mail slot flap cushioned and insulated, name plate and anti-pilfer baffle, compatible with model 02-900, 02-351, 02-361 and 02-431	pc.	325 35	02-950
Stainless steel mail slot flap cushioned and insulated, name plate and anti-pilfer baffle, compatible with model 02-900, 02-351, 02-361 and 02-431	pc.	325 35	02-950E

		Α
		n
		S
		n
		Α
		<b>S</b>
		3

Dimensions in mm Unit Item number Aluminium mail slot flap 240 35 02-252 name plate and anti-pilfer baffle, compatible with model 02-251 240 35 Stainless steel mail slot flap 02-252E name plate and anti-pilfer baffle, compatible with model 02-251 Additional charge: SCS cushioned mail slot flap 35 02-SCS 35 mm mail slot height



Model 02

Mail slot flaps


Mail slot: 50 mm (not according to DIN EN 13724)

Model 02

Model 02

Mail slot flaps Mail slot:

35 mm (according to DIN EN 13724)



Item		Unit	Dimensio W		Order number	
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-100		pc.	230	35	02-720	
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-100		pc.	230	35	02-720E	
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-3	331	pc.	250	35	02-721	
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-3	331	pc.	250	35	02-721E	
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391	and 02-401	pc.	280	35	02-821	
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391	and 02-401	pc.	280	35	02-821E	
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-900, 02-361	and 02-431	pc.	355	35	02-921	
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-900, 02-361	and 02-431	pc.	355	35	02-921E	

Item	Unit	Dimension W		Order number
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-331	pc.	250	50	02-724
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-331	pc.	250	50	02-724E
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391 and 02-401	pc.	280	50	02-824
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391 and 02-401	pc.	280	50	02-824E
Aluminium mail slot flap	pc.	355	50	02-924



name plate and anti-pilfer baffle,

Stainless steel mail slot flap

name plate and anti-pilfer baffle,

compatible with model 02-900, 02-361 and 02-431

compatible with model 02-900, 02-361 and 02-431

A reliable solution against annoying rattling noises! The dampened mailbox flap SCS® Soft-Close-System is available on request for door side systems (model series 02)



02-924E

# Standard installation

# **Economy Class**



# **Business Class**



# Partial installation

# **Economy Class**



# **Business Class**



# First Class



First Class



III. 28/3

Partial installation with central frame

# **Economy Class**



### **Business Class**



# First Class

III. 30/3





III. 31/1 Classic 20 mm 22-251



III. 31/5 Round edge panelling 22-245



III. 31/2 Classic 40 mm 22-261



Libra 20 mm 22-271



III. 31/4 Libra 40 mm 22-281





Hull panelling

Nova 20 mm

22-315



Hull panelling Nova 40 mm 22-335



III. 31/8

Business Class door side system model 02-841 front plate thermally separated mail slot flap 2. name plate yes/no junk mail 21-134/21-146 I/D compartment with intercom grid 21-174 doorbell button 21-216FW name plate 21-134 house number engraving is finished in white



Business class door side systems model partial installation 02-941 front plate tray facing Nova 20 depth produced to customer specifications I/D compartment with intercom grid 21-174 doorbell button 21-217E name plate 21-134

house number engraving is finished in white





Economy Class door side systems model 02-747 diagonal front plate mail slot flap I/D compartment with intercom grid 21-161 name plate doorbell button 21-113 light button 21-100



Mailbox system removal side mailbox 02-747 I/D compartments 02-751

#### ★ JU-Metallwarenfabrik GmbH

Landauer Str. 14, 21-23 74582 Gerabronn

- +49 (0) 7952 603 0
- +49 (0) 7952 603 102
- info@ju-briefkasten.com
- www.ju-briefkasten.com

# ★ JU-Metalltechnik GmbH

Hoymer Str. 10 06469 Seeland/OT Nachterstedt

- +49 (0) 34741 933 0
- +49 (0) 34741 933 10
- info@ju-briefkasten.com
- www.ju-briefkasten.com

# **★** JU-Systemtechnik GmbH

Landauer Str. 14, 21-23 74582 Gerabronn

- +49 (0) 7952 926 074
- +49 (0) 7952 926 154
- info@ju-systemtechnik.com
- www.ju-systemtechnik.com

### ♠ Decayeux GmbH

Gewerbepark Seedoche 7 14806 Bad Belzig

- +49 (0) 33841 97 0
- +49 (0) 33841 97 100
- info@ju-briefkasten.com
- www.ju-briefkasten.com

Your JU-salesman