

Mailbox systems, display cases, steles, signages, parcel locker systems, special equipment

PLANNING DOCUMENTS





First Class fully insulated door side system model 02-941 ISO aluminium front plate and mail slot flap I/D compartment with intercom grid 21-174 doorbell button 21-216FW

module preparation for modules to be supplied by the customer (fingerprint, camera) House number engraving flush with milky acrylic glass and illuminated with LED







Economy Class

heat-insulated

(simple and functional design)

- conventionally proven mail slot flaps
- front plate 24 44 mm, completely
- LM intercom grid, plastic doorbell/ light sensor
- standard colours: EV1 at LM front, RAL 7016, RAL 8022, RAL 9007, RAL 9016 and DB 703, all other

colours with a colour surcharge

- standard lock 21-109

Business Class

(model for sophisticated demands)

- SCS version (dampened mail slot flaps) at no surcharge
- front plate 24 44 mm, completely thermally separated
- punched intercom grid, stainless steel doorbell/light sensor
- LED backlit flush-mounted
- name plate
- reinforced pin cylinder with master key function 21-120

First Class

(fully-insulated model)

- flush-mounted, isolated flap with Soft-Close-System®
- front plate 30 44 mm, thermally separated
- laser cut intercom grid
- flush-mounted stainless steel doorbell button with ring lighting
- LED backlit flush-mounted
- name plates
- housings and removal doors insulated, incl. surrounding seal
- reinforced pin cylinder with master key function 21-120




Model 02-800 ISO

Flush-mounted insulated mail slot flaps

The fully-insulated door side systems has a flush and insulated flap with a soft-close system and a finger recess for easy opening. The mail slot flaps are fitted with a return brake and interlock in order to prevent rattling noises and wind effects. As is the case with all door side system, mail is thrown in from the front and removed from the rear or the interior compartment.

- with flush-mounted, illuminated house number made of
- prepared for on-site installation components (camera, fingerprint, etc.)
- intercom/doorbell system
- flush-mounted, illuminated doorbell buttons
- all lighting elements are designed in long-life and energy-saving LED technology.

The front plate can be thermally insulated in various insulation thicknesses for door side systems. All standard systems are RC2 certified!

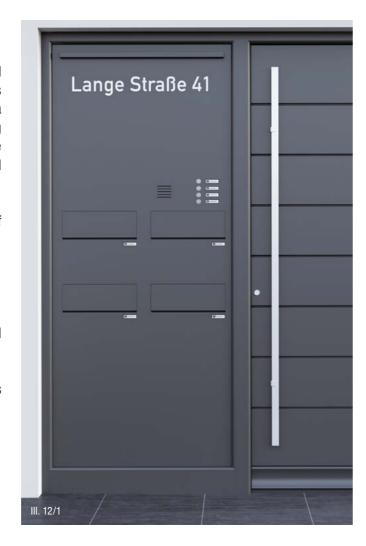

First Class fully insulated door side panels Model 02-841 ISO aluminium front plate and mail slot flap I/D compartment with intercom grid 21-174 doorbell button 21-216FW name plate 21-134 LED strip light street/house number engraving

Standard model:

- fully-insulated inner box with 10 mm insulation all around
- door 10 mm insulated with additional rubber seal
- mail slot flap insulated with a soft-close system
- front plate from 30 mm installation thickness



fully-insulated mailbox design

Box width: 300 mm Mail slot: 250 mm (DIN C4)

Item		Unit		isions i		Order number	
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	165	390	02-841 ISO	300 390
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	220	390	02-842 ISO	300 390
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300	330	390	02-843 ISO	300 339
Fully-insulated installation box, unfitted box can also be used as an info or dummy box		pc.	300	220	160	02-852 ISO	300 160
Fully-insulated installation box, unfitted box can also be used as an info or dummy box		pc.	300	330	160	02-853 ISO	300

Box width:	375 mm	Model 02-900 ISO
Mail slot:	325 mm (DIN C4 landscape)	Would 02-900 150

Item		Unit		nsions i H		Order number	
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375	165	290	02-941 ISO	375 290
Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375	220	290	02-942 ISO	3775 298

Fully-insulated door side systems - 02 JU

Model 02-900 ISO	Box width: 375 mm Mail slot: 325 mm (DIN C4 landscape)				Box width: 300 mm Mail slot: 250 mm (DINC4)				Model 02-400 ISO
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
3300	Fully-insulated through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	рс.	375 330 290	02-943 ISO	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	300 440 160	02-401 ISO	440
375 230					Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 160	02-405 ISO	300 160
375	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 220 160	02-952 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	300 200 160	02-406 ISO	300
3775	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 330 160	02-953 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 160	02-407 ISO	200 160
Model 02-360 ISO	Box width: 375 mm Mail slot: 325 mm (DINC4 landscape)				Box width: 375 mm Mail slot: 325 mm (DIN C4 landscape)				Model 02-430 ISO
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
320	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 160	02-361 ISO	Fully-insulated through-wall mailbox, vertical box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 440 160	02-431 ISO	440
375	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 160	02-365 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 440 160	02-435 ISO	375
375	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 160	02-366 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 160	02-436 ISO	37/5
320	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 160	02-367 ISO	Fully-insulated installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 160	02-437 ISO	

Model 02-100

Box width: Mail slot:


250 mm 230 mm (DIN C4) Box width:

270 mm 250 mm (DIN C4) Mail slot:

Item			Unit	Dimensions in mm W · H · D	Order number	Item		Unit	Dimensions in mm W · H · D	Order number
Through-wall ma box can also be u removal door witl 2 keys and name door hinged on th	sed as an installation or dummy box, cylinder lock, plate,	DIN	pc.	250 100 380	02-112	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	рс.	270 110 380	02-741
Through-wall ma			pc.	250 100/310 320	02-113	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock,	DIN	pc.	270 165 380	02-744
straight upper rei box can also be u	noval side 310 mm portrait, sed as an installation box,	DIN	poi	200 100/010 020	020	2 keys and name plate, door hinged on the right Through-wall mailbox, horizontal		pc.	270 220 380	02-742
door hinged on th						box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate,	DIN	μο.	270 220 300	02 142
Through-wall ma door hinged on th		DIN	pc.	250 100 320	02-115	door hinged on the right Through-wall mailbox, horizontal	DIN	pc.	270 330 380	02-743
Through-wall ma		DIN	pc.	250 200 320	02-128	box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	31.1			
box can also be u door hinged on th	sed as an installation box, e right	БІК				Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN	pc.	270 110/320 320	02-746
Installation box box can also be u door hinged on th	sed as an info or dummy box, e right		pc.	250 100 80	02-125	Through-wall mailbox, diagonal door hinged on the right	DIN	pc.	270 110 320	02-747
Installation box, u box can also be u door hinged on th	sed as an info or dummy box,		pc.	250 200 80	02-129	Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN	pc.	270 220 320	02-748
Assembly surcha	ge depending on the box		pc.		20-100	Installation box, unfitted box can also be used as an info or dummy box,		pc.	270 110 80	02-751
						door hinged on the right Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	270 165 80	02-754
						Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	270 220 80	02-752
						Installation box, unfitted box can also be used as an info or dummy box,		pc.	270 330 80	02-753



Model 02-700





Model 02-900

JU 02 - Through-wall mailbox for the door side

Model 02-800

Box width: Mail slot: 300 mm 280 mm (C4) Box width: 375 mm

Mail slot: 355 mm (DIN C4 landscape)

Item		Unit	Dimensions in mm W · H · D	Order number	Item		Unit	Dimensions in mm W · H · D	Order number
Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300 110 380	02-841	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375 110 280	02-941
Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300 165 380	02-844	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	рс.	375 165 280	02-944
Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300 220 380	02-842	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375 220 280	02-942
Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	300 330 380	02-843	Through-wall mailbox, horizontal box can also be used as an installation or dummy box, removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN	pc.	375 330 280	02-943
Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN	pc.	300 110/320 320	02-846	Through-wall mailbox, diagonal straight upper side, removal door 310 mm portrait, box can also be used as an installation box, door hinged on the right	DIN	pc.	375 110/320 320	02-946
Through-wall mailbox, diagonal door hinged on the right	DIN	pc.	300 110 320	02-847	Through-wall mailbox, diagonal door hinged on the right	DIN	pc.	375 110 320	02-947
Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN	pc.	300 220 320	02-848	Through-wall mailbox, diagonal box can also be used as an installation box, door hinged on the right	DIN	pc.	375 220 320	02-948
Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	300 110 80	02-851	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 110 80	02-951
Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	300 165 80	02-854	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 165 80	02-954
Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	300 220 80	02-852	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 220 80	02-952
Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	300 330 80	02-853	Installation box, unfitted box can also be used as an info or dummy box, door hinged on the right		pc.	375 330 80	02-953

Model 02-250	Box width: 260 mm Mail slot: 240 mm (DIN C4)				Box width: 375 mm Mail slot: 355 mm (DIN C4 landscape)				Model 02-350
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
330	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	260 330 110	02-251	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 110	02-351	320
260	Installation box, unfitted box can also be used as an info or dummy box	pc.	260 330 110	02-255	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 110	02-355	375
260 110	Installation box, unfitted box can also be used as an info or dummy box	pc.	260 200 110	02-256	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 110	02-356	375 110
330	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 330 110	02-257	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 110	02-357	320
200	Assembly surcharge depending on the box	pc.		20-100	Assembly surcharge depending on the box	pc.		20-100	200 476
Model 02-330	Box width: 270 mm Mail slot: 250 mm (DIN C4)				Box width: 375 mm Mail slot: 355 mm (DIN C4 landscape)				Model 02-360
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number	
370	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	270 370 110	02-331	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 320 150	02-361	320
270	Installation box, unfitted box can also be used as an info or dummy box	pc.	270 370 110	02-335	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 320 150	02-365	375
270	Installation box, unfitted box can also be used as an info or dummy box	pc.	270 200 110	02-336	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 150	02-366	375 (50
370	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 370 110	02-337	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 320 150	02-367	320

02 - Through-wall mailbox for the door side

Through-wall mailbox for the door side - 02 JU

Model 02-430

Model 02-390	Box width: 300 mm Mail slot: 280 mm (DINC4)				Box width: 375 mm Mail slot: 355 mm (DIN C4 landscape)			
	Item	Unit	Dimensions in mm W · H · D	Order number	Item	Unit	Dimensions in mm W · H · D	Order number
440	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 440 110	02-391	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	pc.	375 440 150	02-431
300	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 110	02-395	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 440 150	02-435
300 110	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 200 110	02-396	Installation box, unfitted box can also be used as an info or dummy box	pc.	375 200 150	02-436
200	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 110	02-397	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 150	02-437
200 - 10	Assembly surcharge depending on the box	pc.		20-100	Assembly surcharge depending on the box	pc.		20-100
Model 02-400	Box width: 300 mm Mail slot: 280 mm (DIN C4)							
	Item	Unit	Dimensions in mm W · H · D	Order number				
440	Mailbox, vertical removal door with cylinder lock, 2 keys and name plate, door hinged on the right	DIN pc.	300 440 150	02-401				
300	Installation box, unfitted box can also be used as an info or dummy box	pc.	300 440 150	02-405				
300 150	Installation box, unfitted box can also be used as an info or dummy box	рс.	300 200 150	02-406				
90	Installation box, unfitted box can also be used as an info or dummy box	pc.	200 440 150	02-407				

Front plates for door side systems with different insulation

In the case of door side systems, the insulation thickness of the corresponding front panel can be selected in accordance with the structural requirements.


The different front plate types

There are two different versions, which are available in stainless steel or aluminum:


Simple front plate without thermal insulation 02-557

Thermally separated front plate 02-559

The box is located on a separate rear plate which is thermally separated on the insulation layer. This solution represents the best possible thermal insulation that can be achieved.

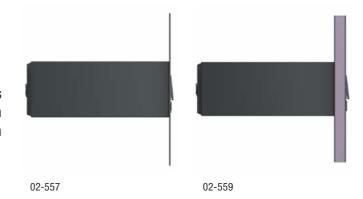

If desired, the front plate thickness can also be matched to the existing fender profile within certain limits. The standard thickness is 24 mm, alternatively also 28/32/36/40/44 mm. All standard systems are RC2 certified!

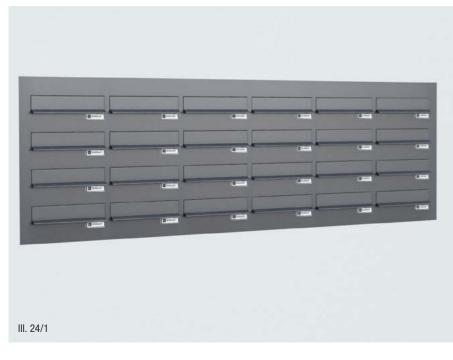





Business class door side system model 02-841 stainless steel front plate mail slot flap with Soft-Close-System insulated mail slot flap

Model 02 Front plate

Item	Unit	Dimensions in mm W H D	Order number
Aluminium front plate 2.5 mm thick, without mail slot flap and accessories	m²	2,5	02-557
Stainless steel front plate 2 mm thick, without mail slot flap and accessories	m²	2	02-557E
Glass strip with thermal separation, to be used for model 02-100 On request!	cm	48 28,5	22-241
Aluminium front plate 24 mm thick, with thermal separation, without mail slot flap and accessories	m ²	24	02-559/24
Aluminium front plate 28 mm thick, with thermal separation, without mail slot flap and accessories	m²	28	02-559/28
Aluminium front plate 32 mm thick, with thermal separation, without mail slot flap and accessories	m²	32	02-559/32
Aluminium front plate 36 mm thick, with thermal separation, without mail slot flap and accessories	m²	36	02-559/36
Aluminium front plate 40 mm thick, with thermal separation, without mail slot flap and accessories	m²	40	02-559/40
Aluminium front plate 44 mm thick, with thermal separation, without mail slot flap and accessories	m²	44	02-559/44
Stainless steel front plate 24 mm thick, with thermal separation, without mail slot flap and accessories	m ²	24	02-559E/2
Stainless steel front plate 28 mm thick, with thermal separation, without mail slot flap and accessories	m²	28	02-559E/
Stainless steel front plate 32 mm thick, with thermal separation, without mail slot flap and accessories	m^2	32	02-559E/
Stainless steel front plate 36 mm thick, with thermal separation, without mail slot flap and accessories	m²	36	02-559E/
Stainless steel front plate 40 mm thick, with thermal separation, without mail slot flap and accessories	m²	40	02-559E/4
Stainless steel front plate 44mm thick, with thermal separation, without mail slot flap and accessories	m²	44	02-559E/





Dimensions in mm

280 50

50

Order

number

02-824

02-824E

Model 02

Mail slot flaps

Flush-mounted mail slot flaps for a minimum compartment height of 165 mm Starting from 30 mm front thickness in according to DIN EN 13724

Mail slot flaps Mail slot:

Item

35 mm (according to DIN EN 13724)

Model 02



number 02-850 02-850E 02-950 Stainless steel mail slot flap 325 35 02-950E cushioned and insulated, name plate and anti-pilfer baffle, compatible with model 02-900, 02-351, 02-361 and 02-431

Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-251	pc.	240	35	02-252
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-251	pc.	240	35	02-252E
Additional charge:				
SCS cushioned mail slot flap 35 mm mail slot height	pc.		35	02-SCS

Mail slot flaps

Mail slot: 50 mm (not according to DIN EN 13724) Model 02

Model	02

Mail slot flaps Mail slot:

35 mm (according to DIN EN 13724)

Item	Unit	Dimensions in mm W · H	Order number	
Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-331	pc.	250 50	02-724	
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-700 and 02-331	pc.	250 50	02-724E	



Aluminium mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391 and 02-401

Alternatives and the floor		0.55
Stainless steel mail slot flap name plate and anti-pilfer baffle, compatible with model 02-800, 02-391 and 02-401	pc.	280

Aluminium mail slot flap
name plate and anti-pilfer baffle,
compatible with model 02-900, 0


luminium mail slot flap ame plate and anti-pilfer baffle, ompatible with model 02-900, 02-361 and 02-431	pc.	355	50	02-924
tainless steel mail slot flap	pc.	355	50	02-924E



compatible with model 02-900, 02-361 and 02-431

A reliable solution against annoying rattling noises! The dampened mailbox flap SCS® Soft-Close-System is available on request for door side systems (model series 02)





Item		Unit	Dimension W		Order number
Aluminium mail sle name plate and ar compatible with m	iti-pilfer baffle,	pc.	230	35	02-720
Stainless steel ma name plate and ar compatible with m	ti-pilfer baffle,	pc.	230	35	02-720E
Aluminium mail sle name plate and ar compatible with m	•	pc.	250	35	02-721
Stainless steel ma name plate and ar compatible with m	•	pc.	250	35	02-721E
Aluminium mail slo name plate and ar compatible with m	•	pc.	280	35	02-821
Stainless steel ma name plate and ar compatible with m	•	pc.	280	35	02-821E
Aluminium mail slo name plate and ar compatible with m	•	pc.	355	35	02-921
Stainless steel ma name plate and ar compatible with m	•	pc.	355	35	02-921E

Standard installation

Economy Class



Business Class



First Class



Partial installation with central frame

Economy Class



Business Class



First Class

III. 29/3







Classic 20 mm 22-251



Classic 40 mm 22-261



Libra 20 mm 22-271



For semi-recessed wall assembly, the minimum panel depth is 80 mm.

III. 30/4 Libra 40 mm 22-281



III. 30/5 Round edge panelling 22-245



III. 30/6 Hull panelling Nova 20 mm 22-315



Hull panelling Nova 40 mm 22-335



Business Class door side system model 02-841 front plate thermally separated 2. name plate yes/no junk mail 21-134/21-146 I/D compartment with intercom grid 21-174 doorbell button 21-216FW name plate 21-134 house number engraving is finished in white



Business class door side systems model partial installation 02-941 front plate mail slot flap tray facing Nova 20 depth produced to customer specifications I/D compartment with intercom grid 21-174 doorbell button 21-217E name plate 21-134 house number engraving is finished in white



Economy Class door side systems model 02-747 diagonal front plate I/D compartment with intercom grid 21-161 name plate doorbell button 21-113 light button 21-100



Mailbox system removal side mailbox 02-747 I/D compartments 02-751



★ JU-Metallwarenfabrik GmbH

Landauer Str. 14, 21-23 74582 Gerabronn

+49 (0) 7952 603 - 0

+49 (0) 7952 603 - 102

info@ju-briefkasten.com

www.ju-briefkasten.com

♠ Decayeux GmbH

Gewerbepark Seedoche 7 14806 Bad Belzig

+49 (0) 33841 97 - 0

+49 (0) 33841 97 - 100

info@ju-briefkasten.com

www.ju-briefkasten.com

Your JU-salesman